

[54] **DEPTH-OF-FOCUS IMAGING PROCESS**

[75] Inventor: **Edward H. Adelson**, Princeton, N.J.

[73] Assignee: **RCA Corporation**, Princeton, N.J.

[21] Appl. No.: **611,962**

[22] Filed: **May 18, 1984**

[51] **Int. Cl.**<sup>4</sup> ..... **G06K 9/36**

[52] **US. Cl.** ..... **382/41**; 382/17;  
382/49; 358/227

[58] **Field of Search** ..... 382/17, 41, 49;  
358/182, 183, 185, 227, 3, 88, 160, 166;  
354/400, 407, 408

[56] **References Cited**

**U.S. PATENT DOCUMENTS**

4,523,230	6/1985	Carlson et al.	358/167
4,561,747	12/1985	Ohna et al.	354/408
4,584,704	7/1990	Ferren	358/227

**OTHER PUBLICATIONS**

"Optional Sectioning," by Kenneth R. Castleman, *Digital ImageProcessing*, 351-379, Prentice-Hall, Inc., 1979.

"Segmentation and Estimation of Image Region Properties through Cooperative Hierarchical Computation," by Peter J. Burt, et al., *IEEE Transactions on Systems, Man, and Cybernetics*, vol. SMC-II, No. 12, 802-809, Dec., 1981.

"The Laplacian Pyramid as a Compact Image Code," by Peter J. Burt, et al., *IEEE Transactions on Communications*, vol. COM-31, No. 4, 532-540, Apr. 1983.

"Fast Algorithms for Estimating Local Image Properties," by Peter J. Burt, *Computer Vision, Graphics, and Image Processing*, 21, 368-382 (1983).

"Tree and Pyramid Structures for Coding Hexagonally Sam-

pled Binary Images," by Peter J. Burt, *Computer Graphics and Image Processing* 14, 271-280 (1980).

"Pyramid-based Extraction of Local Image Features with Applications to Motion and Texture Analysis," by Peter J. Burt, *SPIE*, vol. 360, 114-124.

"Fast Filter Transforms for Image Processing," by Peter J. Burt, *Computer Graphics and Image Processing* 16, 20-51, 1981.

"A Multiresolution Spine with Applications to Image Mosaics," by Peter J. Burt, et al., Image Processing Laboratory, Electrical, Computer, and Systems Engineering Department, Rensselaer Polytechnic Institute, Jun. 1983.

"The Pyramid as a Structure for Efficient Computation," by Peter J. Burt, Image Processing Laboratory, Electrical and Systems Engineering Department, Rensselaer Polytechnic Institute, Jul. 1982.

*Primary Examiner*—Leo H. Boudreau


*Assistant Examiner*—Jose L. Couso

*Attorney, Agent, or Firm*—Joseph S. Tripoli; George J. Seligsohn

[57] **Abstract**

An improved-focus 2-D image is derived from an assemblage of M separately focused 2-D images of the same 3-D scene by (1) employing the Burt Pyramid image analyzing technique to separately analyze each of the M separately focused images into N similar sets of pixel samples, (2) selecting, on a pixel-by-pixel basis from each group of M corresponding sets of the assemblage, the best focused pixel, to derive a single analyzed image of N sets of improved-focus pixels, and (3) employing the Burt Pyramid image synthesizing technique to synthesize the improved-focus 2-D image from the single analyzed image of N sets.

**8 Claims, 5 Drawing Sheets**

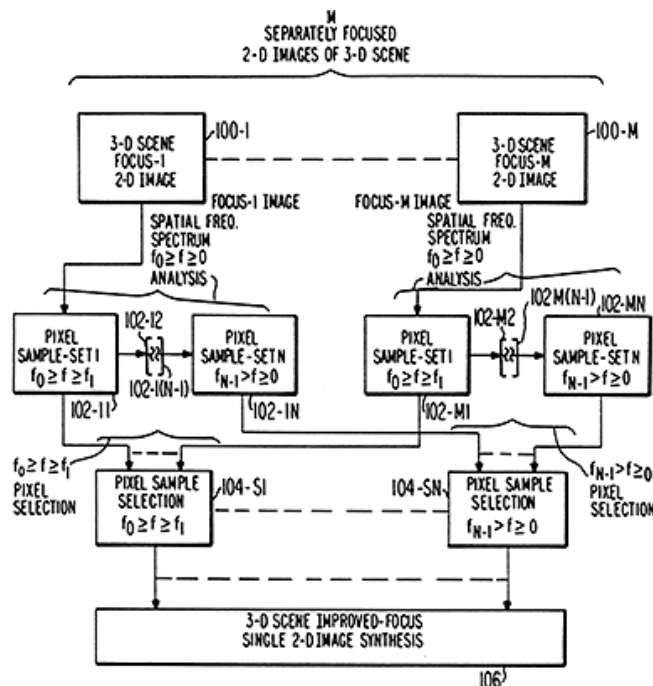

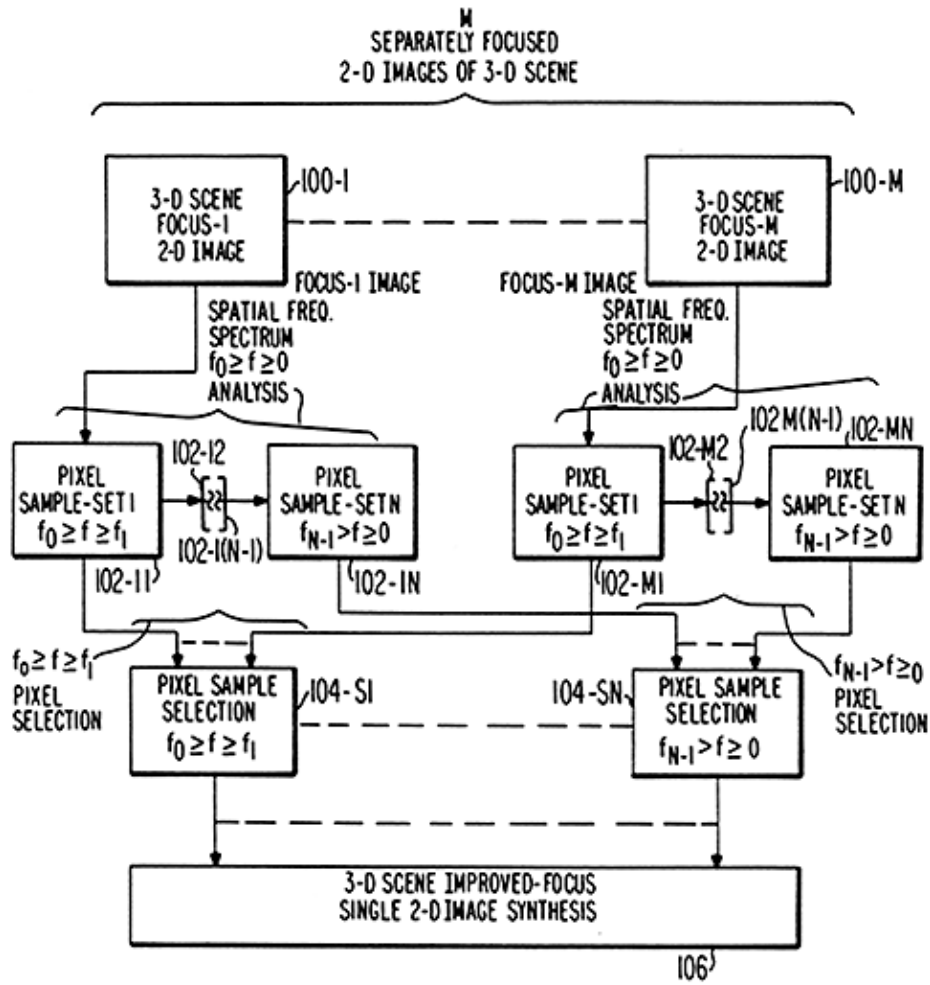


Fig. 1

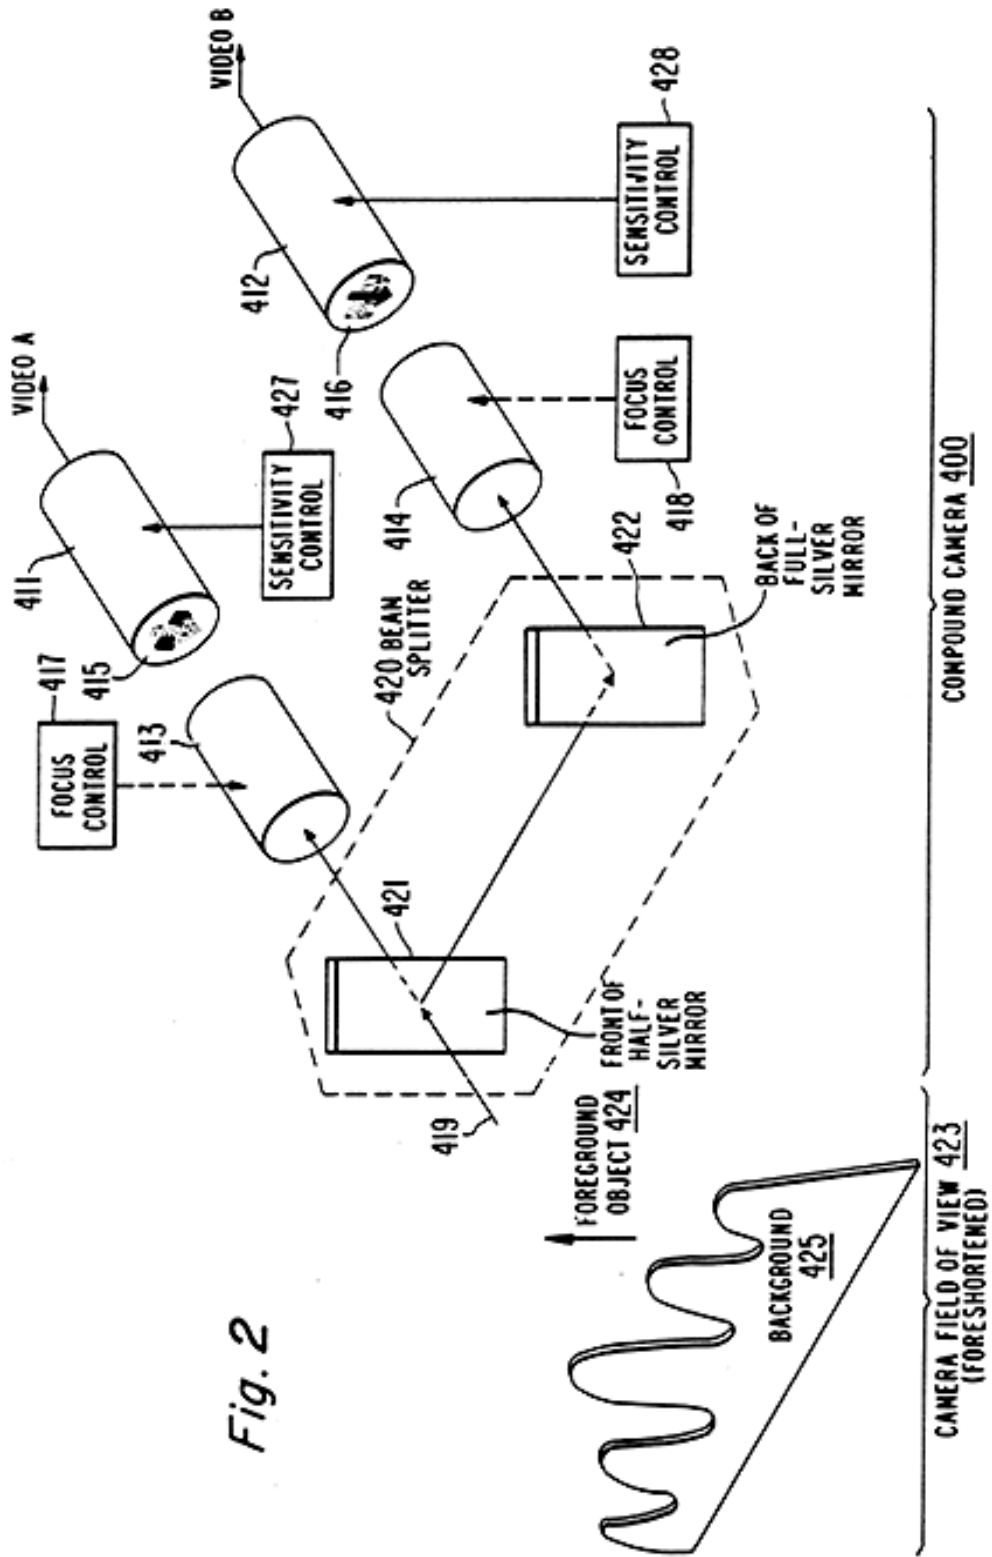


Fig. 2

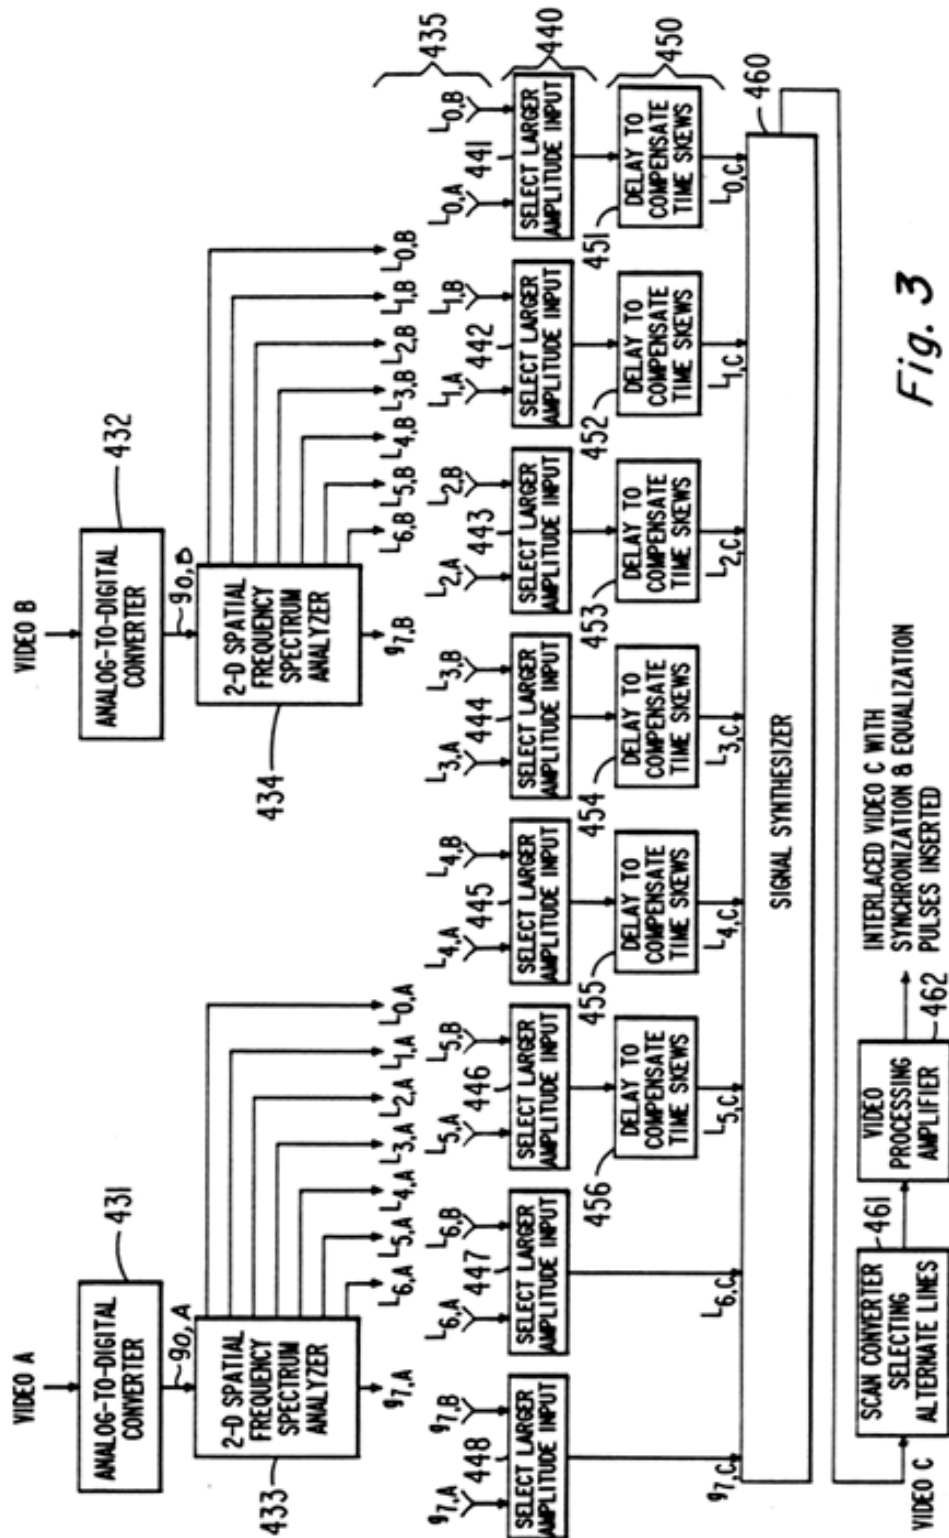


Fig. 3


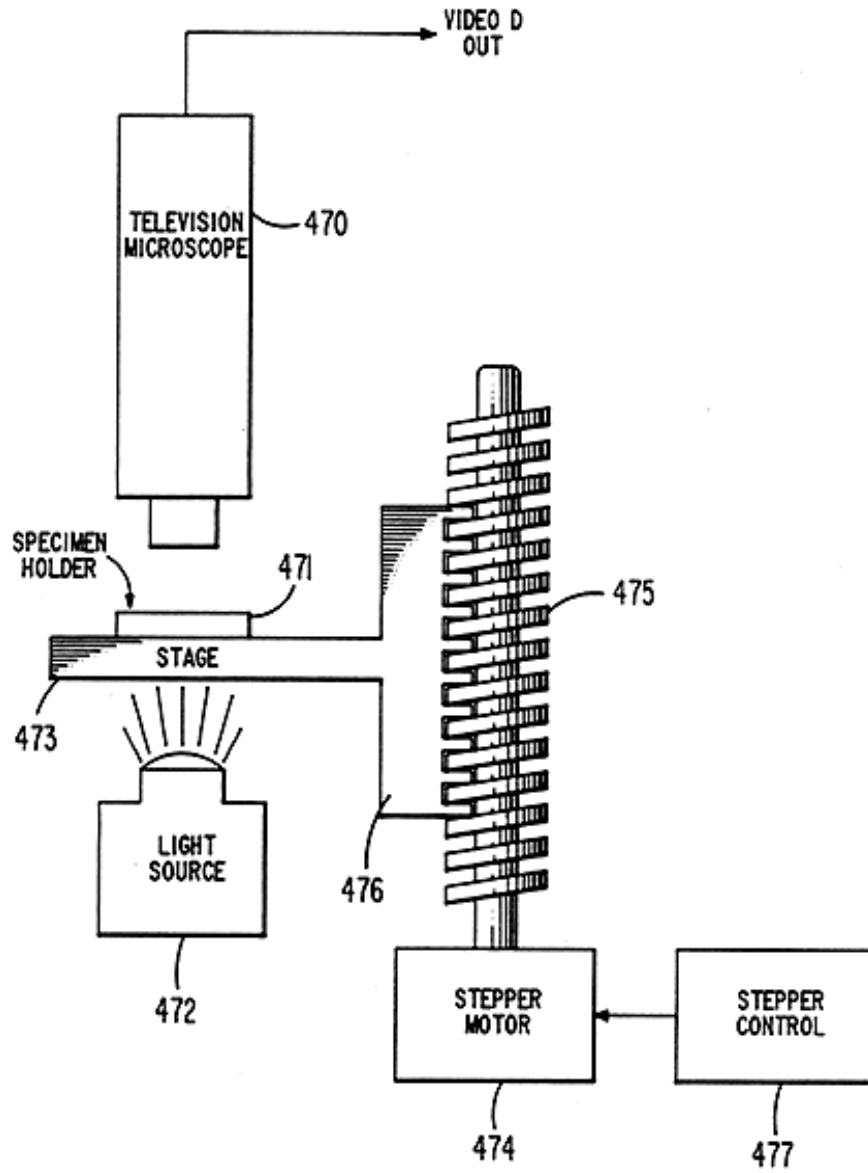


Fig. 4

Fig. 5

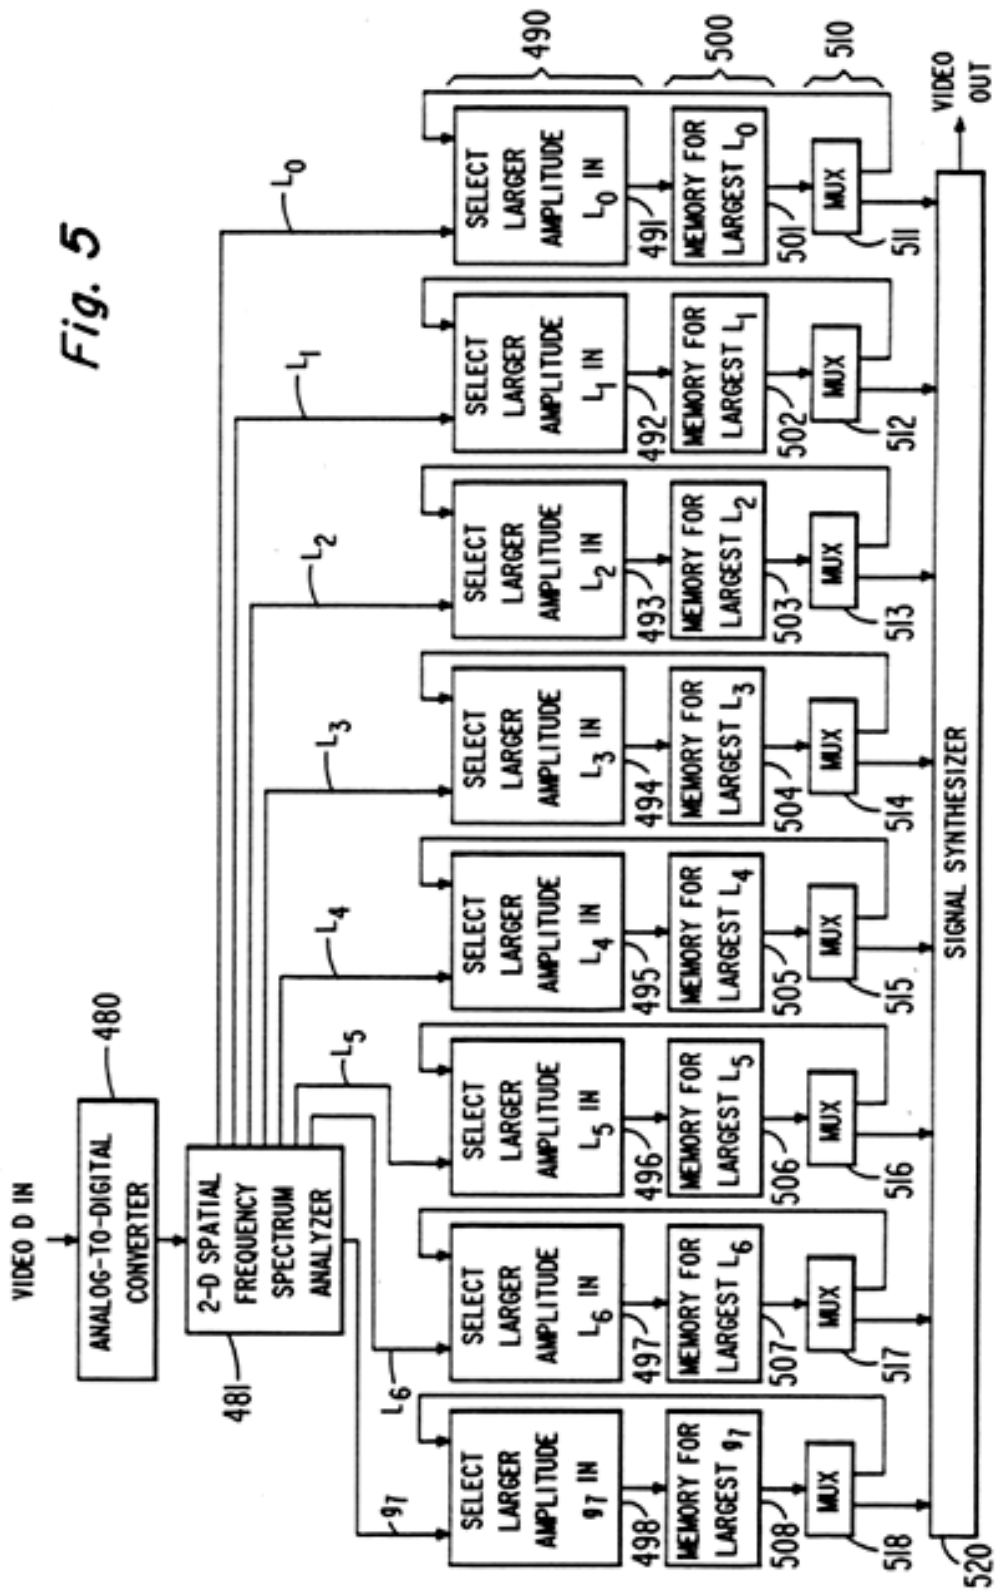

1  
DEPTH-OF-FOCUS IMAGING PROCESS  
METHOD

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to an image-processing method and, more particularly, to an image-processing method for deriving a single improved-focus two-dimensional (2-D) image of a three-dimensional (3-D) scene from a plurality of separately-focused 2-D images of this 3-D scene.

The term "scene", as used herein, means a particular region of 3-D space including all objects situated within that particular region.

2. Description of the Prior Art

As is known in optics, a pin-hole imaging system has a very deep depth-of-focus (i.e., depth-of-field), but has extremely poor light-gathering properties and poor resolution due to diffraction. Therefore, substantially all imaging is accomplished with lens imaging systems, rather than pin-hole imaging systems.

A large aperture lens (i.e., a lens having large numerical aperture and small F number) has greater light-gathering properties and is capable of providing an image of higher spatial resolution than is a small aperture lens. However, a large aperture lens inherently exhibits a relatively small depth-of-focus. For this reason, it is often not possible to produce a 2-D image of a relatively deep 3-D given scene in which both relatively close and relatively distant objects within the scene appear in good focus in the 2-D image.

The problem of insufficiency of depth-of-focus exists when a light microscope is used to examine a 3-D specimen carrying structures that extend in its depth dimension (e.g., microbiology specimens). When such a 3-D specimen is viewed in the microscope, all structures that are not in or near the focal plane are blurred or altogether invisible. One way to overcome this problem is the use of serial sectioning, a technique that involves slicing the specimen to produce a series of thin sections that may be studied individually to develop an understanding of the three-dimensional structure. However, such sectioning gives rise to other problems, such as damage or distortion of the structures carried by the specimen.

Reference is made to pages 351-360 of the book *Digital Image Processing*, by K. R. Castleman, published by Prentice-Hall in 1979. A three-dimensional image processing technique is described on these pages that permits a three-dimensional display to be produced by digitizing the specimen with the focal plane situated at various levels along the optical axis (equivalent to optical scanning) and then processing each resulting image to remove the defocused information from structures in neighboring planes. This approach makes it possible to roughly separate each section image into two components—a sharp component of objects in the plane of focus, and a blurred component contributed by objects lying in the other planes. By extracting the sharp components and stacking them up, a 3-D microscope scene can be displayed with a significant increase in the depth-of-field. However, this approach is only approximately correct, and it requires rather accurate a priori knowledge of the optical system parameters (i.e., optical axis positions and point spread function). Further, published photographs generated by this technique show an

2  
unnatural high-pass quality.

Reference is now made to an image-processing algorithm developed by Dr. Peter J. Burt. Dr. Burt implemented his algorithm (hereinafter referred to as the "Burt Pyramid") by computer in non-real time to effect an analysis of the two-dimensional spatial frequencies of a sampled image into a plurality of separate sets of pixel samples that define specific spatial frequency bands. Each spatial frequency band need not have a "brick wall" roll-off at given cut-off frequencies, but may have a relatively gradual roll-off because the Burt Pyramid inherently compensates for the introduction of spurious frequencies, due to aliasing, caused by a gradual roll-off. In the case of a gradual roll-off, a nominal width of a band is defined as the frequency interval between nominal cut-off frequencies at which some preselected value of attenuation in the gradual roll-off takes place. By way of example, if the highest spatial frequency of interest of the image is no greater than  $f_0$ , the highest frequency band may cover an octave nominal bandwidth from  $f_0/2$  to  $f_0$  (having a center frequency at  $3f_0/4$ ); the next-to-highest frequency band may cover an octave nominal bandwidth from  $f_0/4$  to  $f_0/2$  (having a center frequency at  $3f_0/8$ ), etc. Below the lowest frequency nominal bandwidth octave is a remnant band. Further, the spatial coordinates of corresponding pixel samples of all of the sample sets are the same as one another.

The following list of articles, authored or co-authored by Dr. Burt, describe in detail various aspects of the Burt pyramid:

"Segmentation and Estimation of Image Region Properties Through Cooperative Hierarchical Computation," by Peter J. Burt, et al., *IEEE Transactions on Systems, Man, and Cybernetics*, Vol. SMC-11, No. 12, 802-809, December 1981.

"The Laplacian Pyramid as a Compact Image Code," by Peter J. Burt, et al., *IEEE Transactions on Communications*, Vol. COM-31, No. 4, 532-540, April 1983.

"Fast algorithms for Estimating Local Image Properties," by Peter J. Burt, *Computer Vision, Graphics, and Image Processing*, 21, 368-382 (1983).

"Tree and Pyramid Structures for Coding Hexagonally Sampled Binary Images," by Peter J. Burt. *Computer Graphics and Image Processing* 14, 271-280 (1980).

"Pyramid-based Extraction of Local Image Features with Applications to Motion and Texture Analysis," by Peter J. Burt, *SPIE*, Vol. 360, 114-124.

"Fast Filter Transforms for Image Processing," by Peter J. Burt, *Computer Graphics and Image Processing* 16, 20-51 (1981).

"A Multiresolution Spline with Applications to Image Mosaics," by Peter J. Burt, et al., Image Processing Laboratory, Electrical, Computer, and Systems Engineering Department, Rensselaer Polytechnic Institute, June 1983.

"The Pyramid as a Structure for Efficient Computation," by Peter J. Burt, Image Processing Laboratory, Electrical and Systems Engineering Department, Rensselaer Polytechnic Institute, July, 1982.

Reference is further made to co-pending U. S. patent application, Ser. No. 596,817, entitled "Real-Time Hierarchical Pyramid Signal Processing Apparatus," filed 5 Apr. 4, 1984, by Carlson, Arbeiter and Bessler, and assigned to the same assignee as the present application. This Carlson, et al. application, inter alia, discloses a two-dimensional spatial-frequency spectrum analyzer

using pipe-line architecture to perform spectral analysis in delayed real time, and also discloses apparatus using pipe-line architecture for synthesizing in delayed real time signals descriptive of the sample field analyzed by this two-dimensional spatial frequency spectrum analyzer. The analyzer and synthesizer disclosed in this co-pending Carlson, et al. patent application are capable of implementing the Burt pyramid in delayed real time.

### SUMMARY OF THE INVENTION

The image-processing method of the present invention makes use of the Burt pyramid, implemented either in non-real time (as disclosed by Burt) or implemented in delayed real time (as disclosed in the aforementioned co-pending Carlson, et al. patent application) for processing M (where M is a first plural integer) separately focused two-dimensional images of a given three-dimensional scene to derive therefrom a single improved focus two dimensional image of the given three-dimensional scene. More specifically, the method comprises the steps of first dividing the respective spatial-frequency spectrums of the M two-dimensional images into M substantially similar assemblages of N separate specified pixel sample sets that define N spatial frequency bands (where N is a second plural integer). The respective sample densities of each individual group of sets that define sample corresponding; ones of the specified bands of the M assemblages are substantially the same as one another. The second step is to select, as a given function of the relative levels of a sub-group of corresponding samples of each of the individual groups of sets, a single one of the corresponding samples of that sub-group to derive thereby respective single sets of improved-focus pixel samples for each of the N bands. The third and final step is to combine corresponding pixel samples of the respective single sets to derive thereby the improved-focus two-dimensional image.

The present invention is particularly suitable for use in microscopy for deriving an improved-focus 2-D image of a 3-D microscope specimen. Another important use of the image-processing method of the present invention is deriving a television image display of a 3-D scene in which both foreground objects and background objects in the scene appear in-focus in the television image display, despite significant differences in the respective positions of the foreground and background objects in the depth dimension of the 3-D scene.

### BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a flow chart illustrating the successive steps of the image-processing method of the present invention.

FIG. 2 is a block diagram schematically showing the camera head of a compound television camera employing plural-focusing;

FIG. 3 is a block diagram of apparatus for combining the output video from the two differently focusing component cameras of the FIG. 2 compound television camera, to obtain a video signal descriptive of an image comprising the in-focus portions of both its input video signals;

FIG. 4 is a block diagram schematically showing a television microscope adapted for stepped change in focusing with passage of time; and

FIG. 5 is a block diagram of novel apparatus for processing successive images from the FIG. 4 television microscope to provide a composite image comprising the in-focus portions of those successive images.

### DESCRIPTION OF THE PREFERRED EMBODIMENTS

As indicated in FIG. 1, the image processing method of the present invention operates on M separately focused two-dimensional images of the same 3-D scene. These M images are respectively designated "3-D Scene Focus 1 2-D Image" **100-1** . . . "3-D Scene Focus M 2-D image" **100-M**. Each of separately-focused images **100-1** . . . **100-M** can be either in sampled or non sampled analog form, or, alternatively, in sampled digital form. If the 3-D scene is fixed in time (i.e., does not include moving objects), separate images **100-1** . . . **100-M** of the fixed 3-D scene can be made successively at different times with the same lensing system adjusted at each of these times to a different focus. In this case the resulting 2-D images are stored in respective memories. Alternatively, M separate lensing systems, each having a different focus, may be used simultaneously to produce in real time all of images **100-1** . . . **100-M** of a fixed 3-D scene. If the 3-D scene is not fixed (i.e., includes moving objects) it becomes essential that all of images **100-1** . . . **100-M** be simultaneously produced in real time.

Each of images **100-1** . . . **100-M** has a two-dimensional spatial-frequency spectrum in which the highest spatial frequency of interest is no greater than  $f_0$ . Images **100-1** . . . **100-M** may be prefiltered so that the spatial frequency spectrum of each image contains no spatial frequency greater than  $f_0$ . However, although not desirable, some image spatial frequencies, not of interest, that exceed  $f_0$  can be tolerated, so long as they are of relatively small intensity. In any case, the next step of the image-processing method shown in FIG. 1 is to analyze the spatial frequency spectrum of each one of separate images **100-1** . . . **100-M** in accordance with the teachings of the Burt pyramid and/or of the aforesaid copending patent application of Carlson, et al.

More specifically, as shown in FIG. 1, analysis of the spatial frequency spectrum of image **100-1**, which includes all frequencies of interest between  $f_0$  and zero (D.C.) divides the image **100-1** spatial frequency spectrum into N separate specified spatial frequency bands constituted respectively by the N pixel (picture element) sample sets **102-1** . . . **102-N** (where N is a second plural integer). Thus, whether or not image **100-1** before analysis is a sampled image or a non-sampled image, after analysis each of the N-band component-image sets **102-1** . . . **102-N** of image **100-1** is a sampled image.

As indicated in FIG. 1, the highest frequency band of the spatial frequency spectrum of interest of image **100-1** (which overlaps a portion of the preceding frequency band) is comprised by the first pixel sample set **102-11**. The band of sample set **102-11** includes all those frequencies of interest between the upper frequency interest  $f_0$  and a lower specified frequency  $f_1$ . The pixel sample set **102-12** of the next-to-highest frequency band of the spatial frequency spectrum of image **100-1** covers the frequency interval extending from frequency  $f_1$  to a still lower specified frequency  $f_2$  (FIG. 1). Thus, as indicated in FIG. 1, the frequency band of the Nth pixel sample set **102-1N** is comprised of all those spatial frequencies of the image **100-1** spectrum below  $f_{N-1}$ , where  $f_{N-1}$  is the lowest frequency in the band of (N-1)th pixel sample set **102-1(N-1)** of the image **100-1** spectrum.

The spatial frequency spectrum of an image is divided into (N-1) pixel sample sets that have respective over-



lapping pass bands that, by way of example, may be about one octave in bandwidth each (i.e., the respective peak center frequencies of adjacent bands are separated in frequency by substantially one octave), and a single remnant band which includes all those spatial frequencies that are lower than the lowest octave pass band of the (N—1) separate pixel sets. In this case, the 2-D spatial frequency  $f_1$ , in each of its two dimensions, is about one-half of the spatial frequency  $f_0$  in the corresponding dimension. In like manner,  $f_2$  is about  $f_1/2$  . . . and  $f_{N-1}$  is about  $f_{N-2}/2$ .

As the maximum frequency in each frequency band becomes smaller, the pixel sample density in that band can also be smaller. Therefore, as taught in the Burt Pyramid, each of the respective sample sets, such as sample sets **102-11** . . . **102-1N**, has a predetermined certain sample density, with the certain sample density of a higher-numbered sample set normally being less (and never being more) than the lower-numbered sample set that immediately precedes it. Thus, if each of the pass bands is normally about one octave in bandwidth, the sample density in each dimension of a higher-numbered sample set can be one-half that of the lower-numbered sample set that immediately precedes it.

The spatial frequency spectrum of each other one of the M separately focused 2-D images is analyzed in a manner substantially similar to the analysis of the spatial frequency spectrum of the Focus-1 image **100-1**, described above in detail. The 2-D images **100-2** . . . **100(M-1)** are not explicitly shown in FIG. 1. However, each of these images, as well as the Focus-M image **100-M** (which is shown in FIG. 1) are analyzed into substantially similar sets of N separate specified spatial frequency bands of pixel samples (such as pixel sample sets **102-M1** . . . **102-MN**). Thus, as indicated in FIG. 1, the respective spatial frequency spectrums of the M two-dimensional images **100-1** . . . **100-M** are divided into M substantially similar assemblages of N separate pixel sample sets that define N specified spatial frequency bands.

The total number of pixel sample sets is M X N. This total number of pixel sample sets also can be considered to be made up of N individual groups, with each individual group of sets defining corresponding ones of the N specified bands of the M assemblages. In this case, the first group is composed of sets **102-11** . . . **102-M1**; the second group is comprised of sets **102-12** . . . **102-M2** (and so forth), and the last group is comprised of sets **102-1N** . . . **102-MN**. Further, the respective sample densities of each individual group of sets that define corresponding ones of the specified bands of the M assemblages is the same as one another.

The next step is selecting, from each sub-group of corresponding samples of each of the individual group of sets, a single one of the corresponding samples of that sub-group, to derive thereby respective single sets of improved-focus pixel samples for each of the N bands. This operation is indicated in FIG. 1 by pixel sample selection **104-S1** . . . **104-SN**. The general criterion for selection is a given function of the relative level of the sub-group of corresponding samples of each of the individual groups of sets. In its most simple specific form, that single one of corresponding samples of each subgroup is selected that has the highest absolute value level (where level is indicative of the relative amplitude of each of the corresponding samples of each sub-group of M pixel samples).

In a more complex specific form of the present inven-

tion, the selection is accomplished as a given function of both the relative level of each sub-group of corresponding samples of each of the individual group of sets and the relative distance in the depth dimension of the given 3-D scene represented by each of the corresponding samples of that sub-group. This permits the selection of that single one of the corresponding samples of each sub-group that has an absolute value level that (1) exceeds by at least a certain threshold value the absolute value level of any of the corresponding samples representing a distance in the depth dimension of the 3-D scene which is less than the distance represented by that single one of the corresponding samples, but (2) is not exceeded by more than a certain threshold value by the absolute value level of any of the corresponding samples representing a distance of the depth dimension which is more than the distance represented by that single one of the corresponding samples. Thus, the selection process is biased to a certain extent in favor of foreground over background objects in the 3-D scene.

The result of the selection process is to reduce the M separately focused images of N pixel sample sets so a derived single improved-focus assemblage of N pixel sample sets. The final step **106** is to employ the Burt Pyramid (using either Burt's technique of using a computer that operates in non-real time or, alternatively, the pipe-line architecture technique disclosed in the aforesaid Carlson, et al. patent application operating in delayed real time) to synthesize an improved focus single 2-D image of the 3-D scene.

In order to more concretely illustrate the image-processing method of the present invention, two practical applications thereof are being disclosed. Both practical applications make use of techniques disclosed in detail in the aforementioned co-pending Carlson, et al. patent application. However, the first of these applications relates to real-time television employing a compound television camera with separately focused 2-D images of foreground objects and background objects in a 3-D scene, while the second of these applications relates to use of a television microscope for successively obtaining a series of separately focused 2-D images of different optical sections of a 3-D microscopic specimen being observed. The specific circuitry of each of the respective 2-D spatial frequency analyzers and signal synthesizers, per se shown in FIG. 3 and in FIG. 5, used for implementing my method in delayed real time, are not part of my invention, but are the work of Arbeiter and Bessler (co-inventors of the aforementioned co-pending Carlson, et al. patent application).

In the first of these practical applications, the component images are obtained using a plurality of similar lenses directed to have a like field of view along a common optical axis, but with each lens adjusted to place a different image plane in focus. In the second practical application, the composite image is composed of the in-focus portions of a succession of images obtained using a single lens with intervening adjustments of the distance of the in-focus image plane, assuming the image to exhibit no appreciable motion. The two practical applications will now be described, beginning with the first practical application.

The FIG. 2 schematically-shown monochrome television camera head **400** is a compound television camera that comprises first and second component cameras **411** and **412** having respective optical lenses **413** and **414** for projecting images into their respective im-

ager portions **415** and **416**. Lens **413** and **414** are of similar focal length and have respective focus controls **417** and **418**, which are independent of each other. A beam splitter **420** is used to cause lenses **413** and **414** to project images received along a common input optical axis **419** into imager portions **415** and **416** of cameras **411** and **412**. Beam splitter **420** typically comprises a half-silvered mirror **421** at  $\pi/4$  radian angle to input optical axis for passing half of the input light to lens **413** for focusing on imager **415** and for reflecting the other half of the input light to a full-silvered mirror **422**. This mirror **422** corrects the perversion of image caused by reflection from mirror **421**, reflecting input light to lens **414** for focusing on imager **16**. Further, in practice other optical elements and/or more complicated geometric arrangements of the optical elements from that shown in schematic FIG. 2 may be employed to better match the optical path lengths to the two cameras, and thereby ensure substantially similar fields of view for the two cameras.

The field of view **423** of compound camera **410** is foreshortened in FIG. 2, including a foreground object **424** in the near field and a background **425** in the far field. Focus control **417** will be presumed to be adjusted so lens **413** places the image of background **425** in focus in imager **415**, with the image of foreground object **424** out of focus. Focus control **418** is presumed to be adjusted so lens **414** places the image of foreground object **424** in focus on imager **416**, with the image of background **425** out of focus.

Cameras **411** and **412** are shown with separate sensitivity controls **427** and **428**. Preferably cameras **411** and **412** are CCD cameras capable of supplying over a field time a matrix of non-interlaced video samples in the resolution conventionally associated with a frame of interlaced video samples. Other types of camera may be used together with frame buffer stores to provide full resolution sampling instead of using this type of CCD camera.

The output signals from cameras **411** and **412** are labelled VIDEO A and VIDEO B respectively in FIG. 2. A composite video signal VIDEO C is to be generated in the FIG. 3 apparatus, which video signal describes an image composing the in-focus portions of both the images respectively described by VIDEO A and by VIDEO B.

In FIG. 3 VIDEO A and VIDEO B signals are digitized in analog-to-digital converters (ADC's) **431** and **432** respectively. The sampled data pixel output  $g_{0,A}$  of ADC **431** is supplied as input signal to a spectrum analyzer **433**. Spectrum analyzer **433** separates the pixel output  $g_{0,A}$  into eight pixel sets defining respectively a high-pass spectrum  $L_{0,A}$ ; a succession of band-pass spectra  $L_{1,A}$ ,  $L_{2,A}$ ,  $L_{3,A}$ ,  $L_{4,A}$ ,  $L_{5,A}$  and  $L_{6,A}$  of decreasing spatial frequency; and a remnant low-pass spectrum  $g_{7,A}$ . The sampled data pixel output  $g_{0,B}$  of ADC **432** is analyzed in a spectrum analyzer **434** like spectrum analyzer **433** to provide eight corresponding pixel sets defining respectively a high-pass spectrum  $L_{0,B}$ ; band pass spectra  $L_{1,B}$ ,  $L_{2,B}$ ,  $L_{3,B}$ ,  $L_{4,B}$ ,  $L_{5,B}$  and  $L_{6,B}$ ; and a remnant low-pass spectrum  $g_{7,B}$ .

Connections of the analyzer **433** and **434** outputs to a selection network **440** via an interconnection interface **435** are not drawn in, to keep FIG. 3 from becoming overly complex. Selection network **440** selects the larger absolute value amplitude (level) pixel of the VIDEO A and VIDEO B corresponding pixels in each spectrum pixel sets as the spectral component pix-

el set of the composite pixel sets video signal VIDEO C descriptive of a synthesized image having both background **425** and foreground object **424** simultaneously in focus.

Selection network **440** includes circuitry **441** for selecting the larger absolute value level pixel of its inputs  $L_{0,A}$  and  $L_{0,B}$ , as the highest frequency component of the VIDEO C signal. For example, circuitry **441** may comprise two tri-state latches for selectively forwarding their respective VIDEO A and VIDEO B input signal pixels responsive to control signals from the  $|\text{VIDEO A}| \geq |\text{VIDEO B}|$  and  $|\text{VIDEO B}| \geq |\text{VIDEO A}|$  outputs of a digital comparator receptive of VIDEO A and VIDEO B for comparison. Selection network **440** further includes circuitry **442** for selecting the larger of the corresponding pixels of the  $L_{1,B}$  and  $L_{1,A}$  pixel sets as a spectral component pixel set  $L_{1,C}$  of VIDEO C; circuitry **443** for selecting the larger of the corresponding pixels of the  $L_{2,A}$  and  $L_{2,B}$  pixel sets as a spectral component  $L_{2,C}$  of VIDEO C; circuitry **444** for selecting the larger of the corresponding pixels of the  $L_{3,A}$  and  $L_{3,B}$  pixel sets as a spectral component  $L_{3,C}$  of VIDEO C; circuitry **445** for selecting the larger of the corresponding pixels of the  $L_{4,A}$  and  $L_{4,B}$  pixel sets as a spectral component  $L_{4,C}$  of VIDEO C; circuitry **446** for selecting the larger of the corresponding pixels of the  $L_{5,A}$  and  $L_{5,B}$  pixel sets as a spectral component  $E_{5,C}$  of VIDEO C; and circuitry **447** for selecting the larger of the corresponding pixels of the  $L_{6,A}$  and  $L_{6,B}$  pixel sets as a spectral component  $L_{6,C}$  of VIDEO C; and circuitry **448** for selecting the larger of the corresponding pixels of the  $g_{7,A}$  and  $g_{7,B}$  pixel sets as a spectral component  $g_{7,C}$  of VIDEO C.

A differential delay network **450**, shown as comprising delay lines **451-456**, compensates for the difference between the time skew of corresponding pixels of the respective spectrum components introduced in spectrum analyzers **433** and **434** and the time skew required to combine the corresponding pixels of the respective components into a video C signal in a signal synthesizer **460**. Signal synthesizer **460** is of the same type as would be used to re-synthesize a signal without error from the spectrum analysis provided by spectrum analyzer **433** or the identical spectrum analyzer **434**. VIDEO C output from signal synthesizer is supplied to a scan converter **461**, which deletes alternate lines in each field and stretches the remaining lines in time so as to generate an interlaced video signal. Typically this scan conversion is accomplished using a serial-in-parallel-out register, into which pixels are loaded at a first pixel scan rate on alternate lines of input video, to recurrently side-load a parallel-in-serial-out register, from which pixels are serially clocked out at a second pixel scan rate half the first. This interlaced video signal is applied to a conventional video processing amplifier **462** for insertion of synchronization and equalization pulses.

The portions of VIDEO C descriptive of background **425** are taken from the VIDEO A signal generated by camera **411**. Background **425** is in-focus in imager **415** from which VIDEO A response is derived, but out-of-focus in imager **416** from which VIDEO B response is derived. So VIDEO A has greater high spatial frequency content descriptive of background **425** than VIDEO B. The relatively large spectrum analyzer **433** pixel outputs responsive to VIDEO A will be selected in network **440** in preference to the relatively small corresponding spectrum analyzer **434** pixel outputs responsive to VIDEO B.

The portions of VIDEO C descriptive of foreground object **424** are taken from the VIDEO B signal generated by camera **412**. Foreground object **24** is in-focus in imager **16** from which VIDEO B response is derived, but out-of-focus in imager **415** from which VIDEO A response is derived. So there is greater higher spatial frequency content descriptive of foreground object **424** in VIDEO B than in VIDEO A, so selection in network **440** is in preference to VIDEO B in the portions of image descriptive of foreground object **424**.

The low-spatial-frequency content of VIDEO A and of VIDEO B tends to be similar. The spectrum analyzers **433** and **434** are shown separating the visual frequencies into eight ranges including six middle octaves, designed to overlap approximately the five middle octaves of the seven-octave 30 to 3600 Hz/radian spatial frequency range of the human visual response, as referred to screen edge radius of a television receiver screen. Commercial experience may reveal it not to be necessary to extend band-pass analysis to the lower spatial frequencies where VIDEO A and VIDEO B are pretty much alike.

FIG. **4** shows a television microscope **470**. The specimen in its holder **471** is placed in a succession of different positions between television microscope **470** and a light source **472** responsive to adjustment of the height of its supporting stage **473**. The image plane in focus is at a fixed distance from the lens of the television microscope **470**. The successive changes in the positioning of television microscope **470** and stage **473** with specimen holder **471** atop it are arranged for by using a stepper motor **474** to periodically rotate a lead screw **475** by a fixed increment. A rack **476** engaging lead screw **475** converts the rotary motion to translatory motion of the rack **476** and attached stage **473**. Stepper control electronics **477** energizes stepper motor **474** in intervals between scanings of the specimen image by television microscope **470**. The video output signal VIDEO D from television microscope **470** comprises a series of optical sections of the specimen. Only those portions in the very shallow depth-of-field image plane appear in focus in an optical section, so the in-focus condition can be used to describe a third dimension of the image, as is well known.

FIG. **5** diagrams the electronics used to process the successive frames of VIDEO D from the television microscope. VIDEO D is digitized in analog to digital converter **480**, and the digitized sampled data pixels are supplied as input to a spectrum analyzer **481** for conversion to pixel-set spectrum components  $L_0, L_1, L_2, L_3, L_4, L_5, L_6$  and  $g_7$ . Selector circuitry **490** includes elements **491, 492, 493, 494, 495, 496, 497** and **498** which compare pixels of these spectra to corresponding pixels of spectra read from a spectrum analysis memory **500** the portions **501, 502, 503, 504, 505, 506, 507** and **508** of which store image spectra in bit-map organization. A set **510** of multiplexers **511, 512, 513, 514, 515, 516, 517** and **518** are used to apply the read-outs from spectrum analysis memory **500** to selector circuitry **490** at this time. Selector circuitry selects the larger absolute valued level of corresponding pixels of each one of spectrum components directly from spectrum analyzer **481** and from spectrum analysis memory **500**, and the selected pixels of the respective spectrum components are used to replace the former contents of memory **500**. When the whole succession of VIDEO D frames at different focus settings of television microscope **470** is complete, the

set **510** of multiplexers forward the spectrum analyses pixel sets remaining in memory **500** to signal synthesizer **520** to be synthesized into video output signal

During the process of selecting the larger of each of the corresponding pixels of the respective spectral components, one can store in bit-map organized memory (not shown) the frame numbers associated with updates of the highest spatial frequency spectrum to change in memory **500**. These numbers can afford a basis for z-axis modulation of picture element position in a "three-dimensional" television display using the video output of signal synthesizer **520** as the basis for x-axis and y-axis positioning of picture elements.

(It should be noted that the electronic circuitry of FIGS. **3** and **5** is of a sort generally applicable to selecting between corresponding pixels in a plurality of spectrum analyses. That is, the selection between pixels of the spectra can be based on other criteria than their relative levels. Furthermore, the various 2-D images which are analyzed may be from entirely different 3-D scenes. In this case, the selection between corresponding pixels can create a new 2-D image representing a combination of the analyzed images.)

While FIGS. **2-5** have been described in the context of dealing with monochromatic images, the extension of the image processing techniques to polychromatic images is straightforward. Beam splitting of the light received by each camera into three portions subjected to subtractive color filtering and detection by respective imager elements is used to generate video signals descriptive of three primary or complementary-to-primary colors. These signals are each processed in the same way as described for monochromatic signals. This generates signals descriptive of the same colors, but with out-of-focus information suppressed in favor of in-focus information. The signals are converted to red, green and blue signals for driving a color kinescope directly or converted to a format for color television transmission.

What is claimed is:

1. A method for processing M (where M is a first plural integer) two-dimensional images of a given three-dimensional spatial scene, which images are separately focused in the depth dimension, to derive therefrom a single improved-focus two-dimensional image of said given three-dimensional scene, each of said M images being defined by a spatial-frequency spectrum corresponding thereto; said method comprising the steps of:

(a) dividing the respective spatial-frequency spectra of said M two-dimensional images into M substantially similar assemblages of N separate sets of pixel samples having sample levels that vary in height and defining N specified spatial frequency bands (where N is a second plural integer), each of said N separate sets occurring at a sample density that corresponds therewith and the respective sample densities of each individual group of sets that define corresponding ones of said specified bands of said M assemblages being substantially the same as one another;

(b) selecting, as a given function of the relative levels of a sub-group of corresponding samples of each of said individual group of sets, a single one of the corresponding samples of that sub-group to derive thereby respective single sets of improved-focus pixel samples for each of said N bands; and

11

- (c) combining corresponding pixel samples of said respective single sets to derive thereby said improved-focus two-dimensional image.
- 2. The method defined in claim 1, wherein step (b) comprises:
  - 5 selecting that single one of corresponding samples of each of said sub-groups that has the highest absolute-value level.
- 3. The method defined in claim 1 wherein each of said M separately focused two-dimensional images is focused at a different focus-distance in the depth dimension of said given three dimensional scene, and step (b) comprises:
  - 10 selecting as a given function of both the relative levels of each sub-group of corresponding samples of each of said individual groups of sets and the relative focus distance in the depth dimension of said given three-dimensional scene represented by the corresponding samples of that sub-group, a single one of the corresponding samples of that sub-group to derive thereby respective single sets of improved-focus pixel samples for each of said N bands.
- 4. The method defined in claim 3, wherein step (b) comprises:
  - 25 selecting that single one of the corresponding samples of each of said sub-group that has a level that (1) exceeds by at least a certain threshold value the level of any of the corresponding samples representing a focus-distance in the depth dimension of said three-dimensional scene which is less than the focus-distance represented by said single one of said corresponding samples, but (2) is not exceeded by more than a certain threshold value by the level of any of the corresponding samples representing a focus-distance in the depth dimension which is more than the focus-distance represented by said single one of the corresponding samples.
- 5. The method defined in claim 1, wherein each of the respective spectra that correspond to said M two-dimensional images has an uppermost spatial frequency and is divided into (N—1) separate spatial frequency pass bands including a highest spatial frequency pass band having a peak center frequency substantially equal to 3/4

12

- of its spectrum's uppermost spatial frequency, each of which pass bands has a peak center frequency that is separated in frequency from the peak center frequency of any pass band adjacent thereto by substantially one octave, and a single remnant band which includes all those spatial frequencies of that respective spectrum which are lower than the spatial frequencies of the lowest peak-center-frequency pass band of said (N—1) separate pass bands.
- 6. The method defined in claim 5, wherein step (b) comprises:
  - selecting that single one of corresponding samples of each of said sub-groups that has the highest level.
- 7. The method defined in claim 5, wherein each of said M separately focused two-dimensional images is focused at a different focus-distance in the depth dimension of said given three dimensional scene, and step (b) comprises:
  - 15 selecting as a given function of both the relative levels of each sub-group of corresponding samples of each of said individual groups of sets and the relative focus-distance in the depth dimension of said given three-dimensional scene represented by the corresponding samples of that sub-group, a single one of the corresponding samples of that sub-group to derive thereby respective single sets of improved-focus pixel samples for each of said N bands.
- 8. The method defined in claim 7, wherein step (b) comprises:
  - 30 selecting that single one of the corresponding samples of each of said sub-group that has a level that (1) exceeds by at least a certain threshold value the level of any of the corresponding samples representing a focus-distance in the depth dimension of said three-dimensional which is less than the focus distance represented by said single one of said corresponding samples, but (2) is not exceeded by more than a certain threshold value by the level of any of the corresponding samples representing a focus-distance in the depth dimension which is more than the distance represented by said single one of the corresponding samples.

\* \* \* \* \*

50  
  
55  
  
60  
  
65